



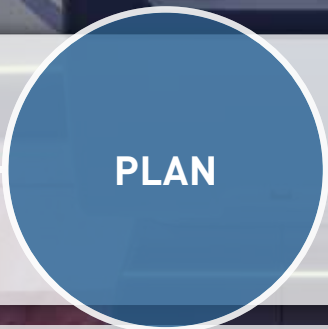

# *IMPROVED POSITIONING WORKFLOW FOR TOMOTHERAPY™*

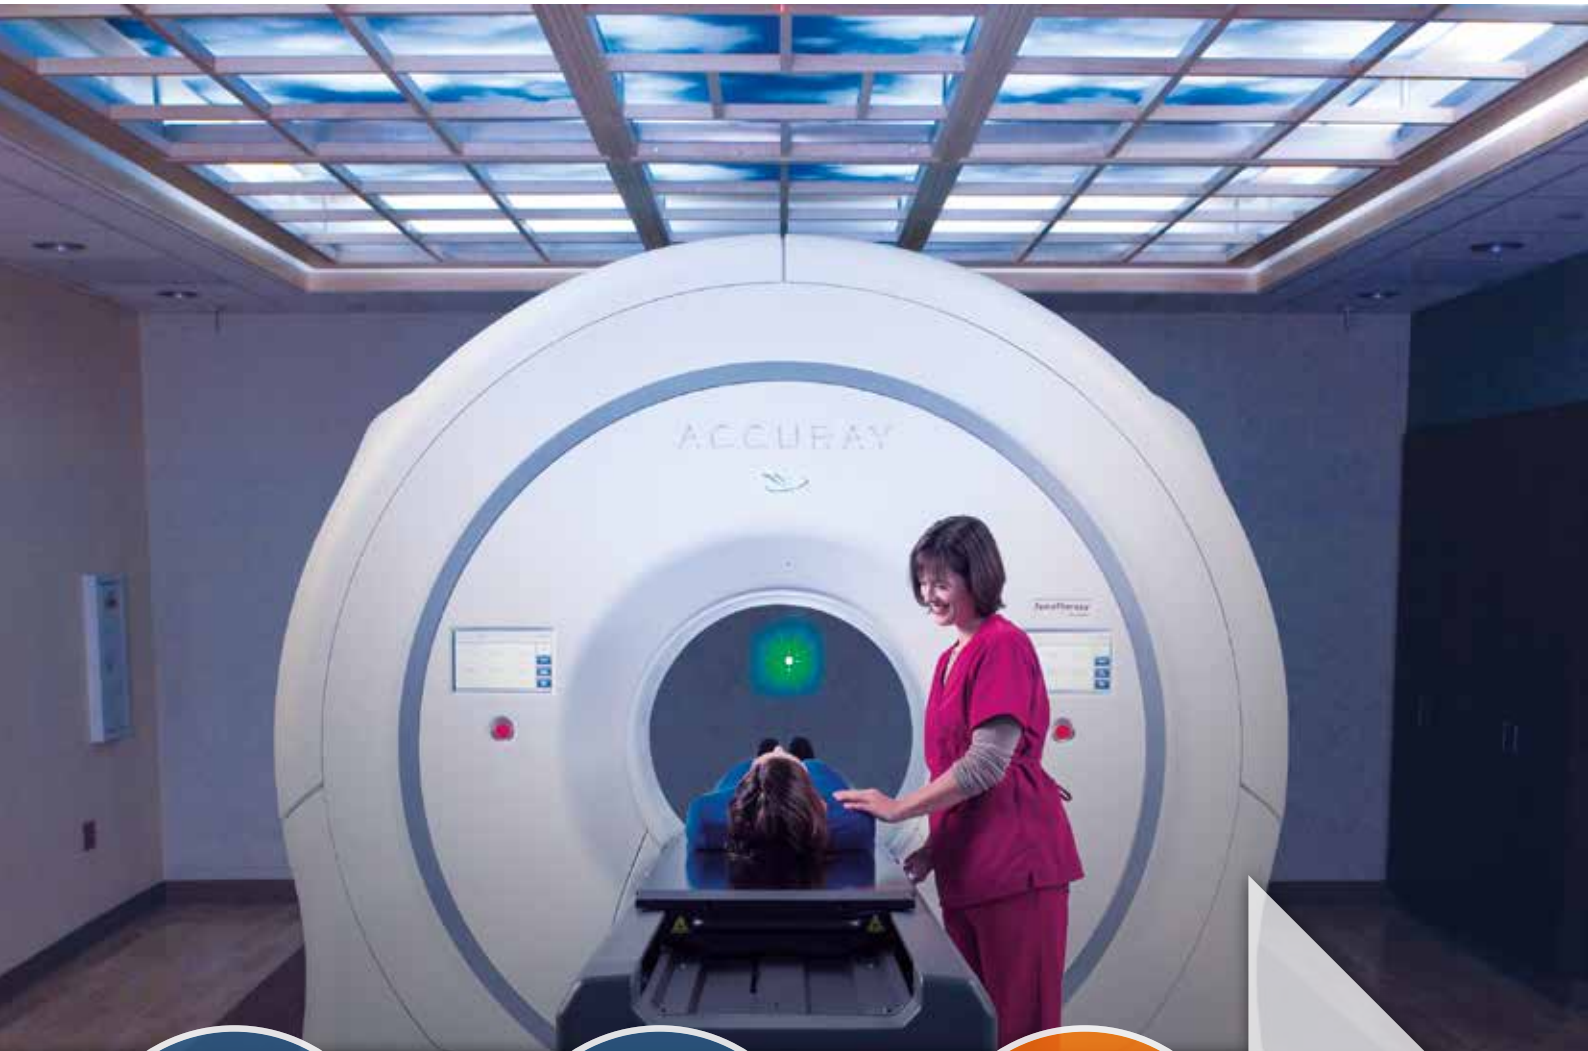

## **Innovative SIGRT Solution**

Image courtesy of Accuray.



The complex nature of TomoTherapy Treatments emphasizes the importance of accuracy of the target position and maintaining the position during the entire treatment.

With its unique capacity for real-time image acquisition and visual guidance, the Catalyst™ Tomo is the ideal solution for addressing these challenges.



Image courtesy of Accuray.

## C-RAD TOMOTHERAPY™ POSITIONING SOLUTION INCLUDES:

### Enhanced SIGRT Solution for TomoTherapy

- Single Catalyst system for TomoTherapy
- The images from planning CT or Sentinel 4D CT can be used as reference for positioning
- Large patient surface coverage (1300x800x700mm) with interactive visual guidance via color map projected on patient body during setup.

### High level of patient safety and user confidence

- No markers on or around the patient
- Dose-free surface image-guided solution
- Compliant to the immobilization devices
- An optional customized installation kit as option will reduce the impact on service and maintenance of the TomoTherapy system

### Increasing productivity without compromising the treatment quality

- Non-rigid algorithm improves accuracy and speed of clinical application.
- A complementary workflow for patient setup and positioning with Catalyst can be used to potentially reduce the need for MVCT verifications, with the benefit of delivering smaller doses to healthy tissue.
- Highly integrated QA/QC procedure – Daily QC in less than 5 minutes

\* TOMOTHERAPY is the trademark of Accuray Inc.



**HIGH  
PRECISION**



**HIGH  
EFFICIENCY**



**PATIENT  
SAFETY**

For more information please visit:

[WWW.C-RAD.COM](http://WWW.C-RAD.COM)



# REDEFINING PRECISION IN ADVANCED RADIATION THERAPY



## SYSTEM DATA

### Physical dimensions

- *Size (W x D x H):* 620 mm x 280 mm x 400 mm
- *Weight:* 16 kg (35 lbs)

### Power

- *Input voltage:* 100 – 240 VAC
- *Frequency:* 47 – 63 Hz
- *Power consumption:* 1.8 A

### Environment

- *Operating temperature:* +10 °C to +35 °C  
(50 °F to 95 °F)

### Light projection

- *Wavelengths:* 405 nm (near-invisible violet), 528 nm (green), 624 nm (red)

### Performance

- *Scan volume (X \* Y \* Z):* 800 mm x 1300 mm x 700 mm.
- *Measurement reproducibility:* 0.2 mm
- *Long-term stability:* 0.3 mm
- *Warm-up time:* 30 minutes
- *Scan speed:* Up to 80 complete 3D surfaces per second
- *Registration method:* Real-time, non-rigid with deformable models for computing 6 DOF isocentric shifts
- *Positioning accuracy:* Within 1 mm for rigid body

\*Full system data upon request

#### C-RAD AB (publ)

#### C-RAD Positioning AB

Bredgränd 18, SE-753 20 Uppsala, Sweden  
Telephone +46 18-66 69 30  
[www.c-rad.com](http://www.c-rad.com)

#### C-RAD Inc.

70 SE 4th Ave, Delray Beach, FL 33483, USA  
Telephone: +1 561 742 9260  
[www.c-rad.com](http://www.c-rad.com)

#### C-RAD GmbH

Wittestr. 30 K, 13509 Berlin, Germany  
Telephone: +49 30 609847560  
[www.c-rad.com](http://www.c-rad.com)

#### C-RAD

Suite 1308, Bao Hua Tower, 13/F,  
No 1211 Changde Road (Changshou Rd.),  
Putuo District, Shanghai,  
P.R. China, 200060